


## PREFABRICATED SPRINKLER PIPES

Our new factory in Romania, Pro Piping Products, is specialised in the production of high quality prefabricated sprinkler pipes. There, we implement strict control measures to ensure each pipe meets the highest industry standards. Our new installations for welding and painting are completely automated, guaranteeing high and consistent quality of welded products.



MORE INFO

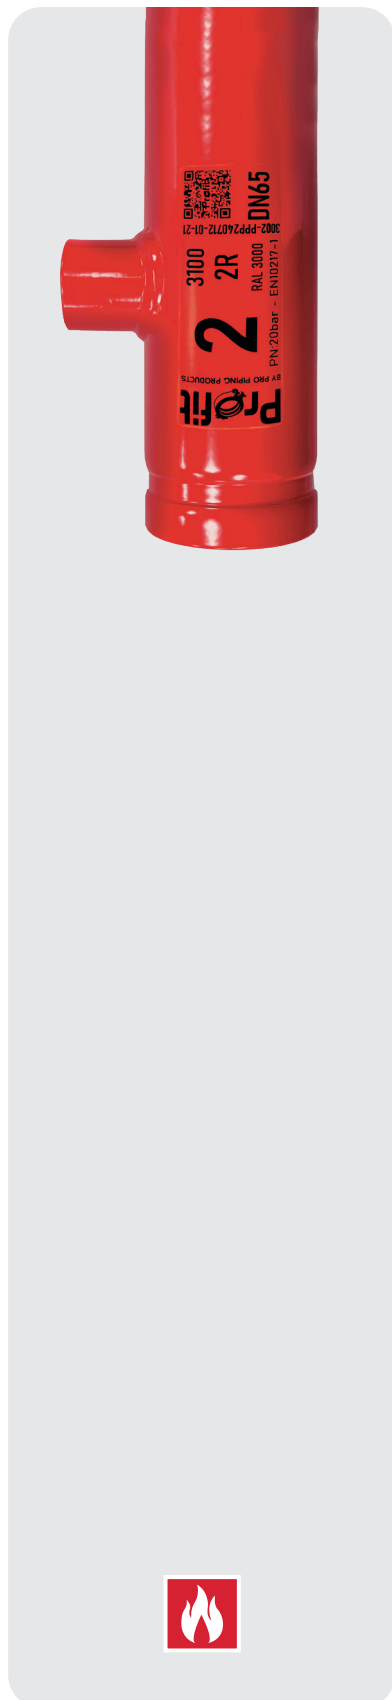

| Dimensions |         |            |                |                |                 |               |          |            |
|------------|---------|------------|----------------|----------------|-----------------|---------------|----------|------------|
| DN         | OD (mm) | NPS (inch) | Thickness (mm) | Min.length (m) | Max. length (m) | Weight (kg/m) | Length   |            |
|            |         |            |                |                |                 |               | 6m       | +6m        |
| 32         | 42,4    | 1¼"        | 2,6            | 3              | 6,25            | 2,55          | in stock | on request |
| 40         | 48,3    | 1½"        | 2,6            | 3              | 6,25            | 2,93          | in stock | on request |
| 50         | 60,3    | 2"         | 2,6            | 3              | 6,25            | 3,70          | in stock | on request |
| 65         | 76,1    | 2½"        | 2,0            | 3              | 6,25            | 3,90          | in stock | on request |
| 65         | 76,1    | 2½"        | 2,6            | 3              | 6,25            | 4,71          | in stock | on request |
| 80         | 88,9    | 3"         | 2,0            | 3              | 6,25            | 4,50          | in stock | on request |
| 80         | 88,9    | 3"         | 2,9            | 3              | 6,25            | 6,15          | in stock | on request |
| 100        | 114,3   | 4"         | 3,2            | 3              | 6,25            | 8,77          | in stock | on request |
| 125        | 139,7   | 5"         | 3,6            | 3              | 6,25            | 12,10         | in stock | on request |
| 150        | 168,3   | 6"         | 4              | 3              | 6,25            | 16,21         | in stock | on request |
| 200        | 219,1   | 8"         | 4,5            | 3              | 6,25            | 23,82         | in stock | on request |



- Rolled groove dimensions according to AWWA C606.
- Markings are applied by inkjet printing for optimum quality and permanent adhesion, even under adverse external influences.
- Standard 10217-1 steel grade P235TR1.
- Standard BSPT outlet (NPT available on request).
- Pipe length tolerances:
  - DN25 to DN125: 0/+5mm.
  - DN150 to DN200: 0/+30mm.
- **Working pressure:** pressure nominal = 2,07 MPa / 20,7 bar / 300 psi.
- **Certifications and standards:**
  - FM standard approval (coming soon).
  - EN 10217-1.
  - ISU certificate.
  - ISO 9001.
  - ISO 14001.
- **Coating:**
  - Epoxy RAL 3000 (standard).
  - Other colours (on request).